


# MCO

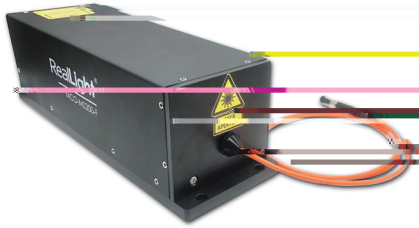


MCO RealSubns®



1ns  
1~200Hz

100ps

光学参数				
(nm)	1064	532	355	266
(Hz)	1~200			
( J)	50	25	25	10
(ns)	1			
(rms)	3%			
	2%			
	100:1			
	200 m/0.22NA			
系统参数				
	24V DC			
	TTL0-5V SMB			
	RS-232			
(W)	<20			
(W)	<10			
(W×H×L,mm)	82x79x250			
( )	15~35			
( )	-10~60			

1. 16~200Hz
2. 90~260VAC
- 3.

MCO -  - 02 - 01

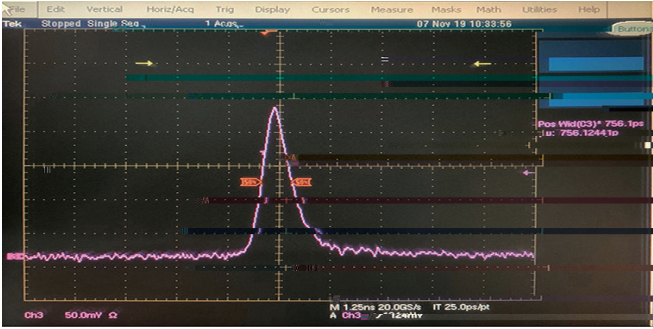

mm

