

NLM



NLM RealStable®

RL-RP


<0.1nm

±7pm@4h (温度漂移<±0.1)

40dB

TEC

±2%

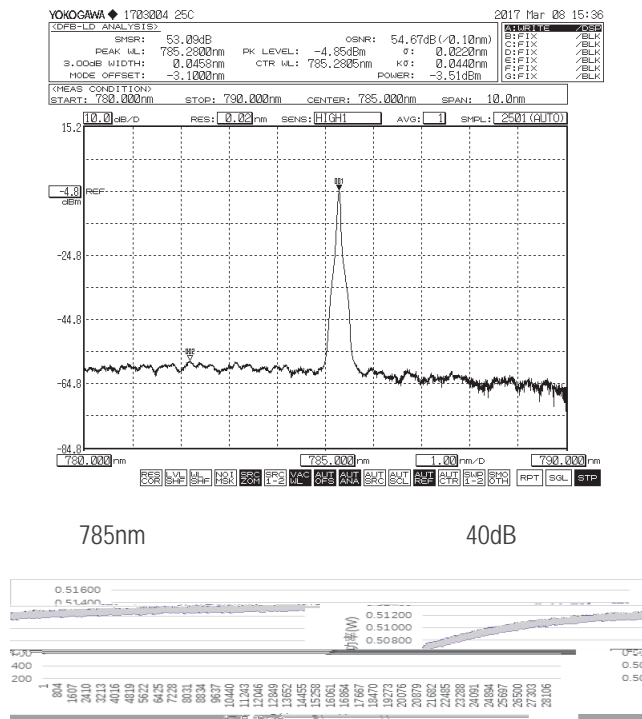

光学参数						
(nm)	638	785	808	830	976	1064
(mW)	500	600	600	600	800	800
(nm)	±0.5					
(nm)	<0.1	<0.1	<0.3	<0.1	<0.3	<0.1
	±7pm@4h Typ.					
	±2%@4h Typ.					
(dB)	>35	>40				
系统参数						
	0~100%					
min	15					
	0~5V					
	USB, BNC					
	SMA905, FC/PC					
	105 m, 0.22 NA					
	+5VDC					
	<20 W Typ.					
	10~60					
	0~80% RH					
	10~35					
kg	1.2					
mm	168×88×140					

785nm

4

C/PC
SMA9

